


56" MagneScan

ATEX

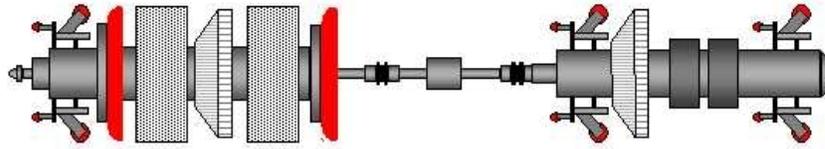

Tool Specifications

Property	Specification
Total Length	5547 mm
Weight	5674 kg
Modules	2
Maximum Wall thickness	22.6 mm @ 5.0 m/s
Maximum Wall thickness	22.6 mm @ 0.3 m/s
Minimum Wall thickness	13.0 mm
Inspection range **	74.0 Km
Run time	60.2 hrs

Operating Parameters

Property	Specification
Maximum Pressure	220 bar
Temperature range	0 to 40 °C
Maximum Speed	5.0 m/s

Pipeline Parameters


Property	Specification
Bend min. centerline radius	3D Back-to-back bends 90°
Min. ID in straight pipe	1341 mm
Min. ID in bend	1341 mm
Max nominal ID	1396 mm
Tees	
Max. diameter barred	1422 mm
Max. diameter unbarred	853 mm
Min. full bore adjacent tees -Centerline separation	3551 mm
Valves	
Ball valves min. bore	1274 mm
Gate valves min. bore -max void length	180 mm
Gauge plate diameter	1274 mm

This specification reflects the capabilities of this particular tool configuration. For pipeline conditions outside the scope of this application consult with your local Sales Representative to evaluate alternate builds of tool for specific wall thickness, run time etc.


**Depends on pipeline construction

Standard Trap Dimensions

Launcher Dimensions

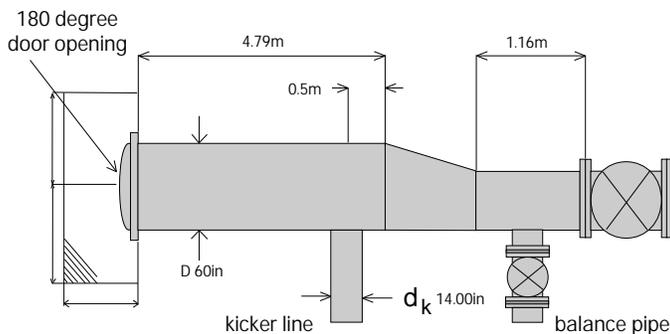

Receiver Dimensions

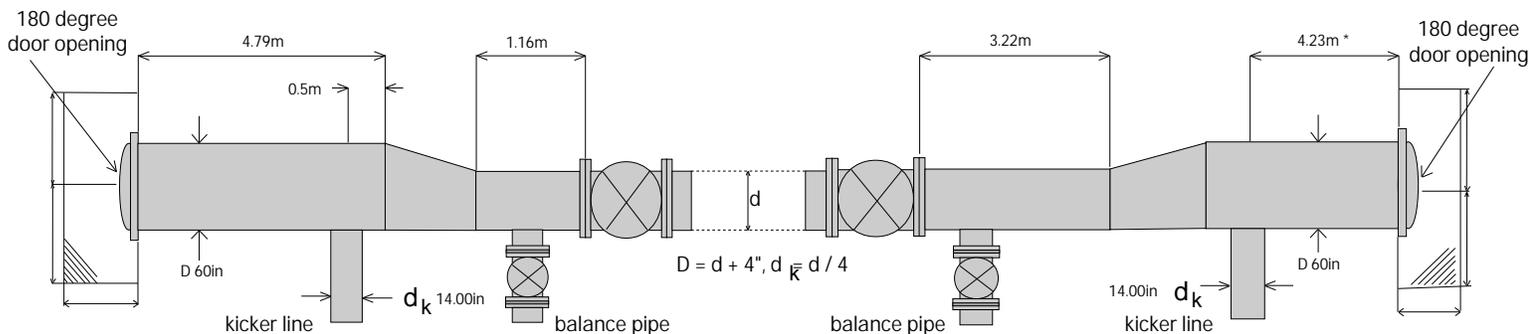

These trap dimensions are for new traps, PII Pipeline Solutions have extensive field proven experience accommodating existing traps. Please contact your GE representative for further information.

* may be reduced by 1m for liquids

GT/35600/0001 Drawing Rev : 6 Spec Issue : 11 Date 09-APR-10
GM/60552/0000 Drawing Rev : 9 Spec Issue : 1 Date 03-JAN-12



The information contained herein is not specific to any pipeline and is only intended to convey the general performance capabilities of the inspection tool. This information is not intended to form part of a contract or legally binding document.

MagneScan is a trademark of PII Group Limited.
© 2006 General Electric Company. All Rights Reserved.
Specifications may change without notice.