

LL STREET ESS70-16-33W

PRODUCT SHEET

Street & Urban

LL STREET ESS is designed for energy-efficient lighting for most types of roads in towns and villages. The luminaire can be equipped with electronic modules and controlled and monitored by central control unit.

Features


- LED technology
- Aluminium body with optimal temperature parameters
- Wide choice of special optics
- Special technology of optical part provides improved performance and easy maintenance in comparison with standard luminaires with glass cover
- Maximal reduction of obtrusive light pollution, glare and radiation into the sky
- Precise setting of demanded output power
- High energy savings and fast return of investment

Application

- Major roads and streets
- Parking lots, pedestrian zones
- Tunnels



Product variants



LL STREET ESS39-08-13W
LL STREET ESS39-08-22W
LL STREET ESS39-09-16W
LL STREET ESS39-09-25W



LL STREET ESS70-18-40W
LL STREET ESS70-16-48W
LL STREET ESS70-18-60W




TECHNICAL SPECIFICATION

Electrical data	
Input voltage	90–305 V AC, 47–63 Hz
Power	33 W
Max. inrush current	cold start 55 A ($t_{width} = 270 \mu s$, 50% I_{peak}), 230 V AC
Class	II
Driver	Included
Light source	
Light source	16 x LED
Exchangeable	no
Photometrical data	
Optic	Standard: AT Optional: WAS, ASY, DWC, ATD, ASD, ASA, ATW, VSM
CCT	Standard: 4,000 K Optional: 3,000 K, 5,000 K
CRI	Standard: 75 Optional: 80, 90
Light technical data	
Lifespan L70 B20	150,000 hours, Ta 15 ° C
Efficiency	Min. 100 lm/W
Operation conditions	
Control	Standard: On / Off Optional: IQRF, CLO, DLO, CLO / DLO, PWL
IP rating	IP67
Operation temperature	-30 ° C to +40 ° C
Cooling	Conventional
Product data	
Body	IK10
Color	Standard: Natural Optional: Black or RAL
Material	Anodized aluminium
Packing information (preliminary information)	
Dimension (box)	725 mm x 125 mm x 137 mm
Weight	3,45 kg

M. Gorkého 33
SK - 052 01 Spišská Nová Ves
Slovak Republic

tel.: +421 (0) 53 41 888 11
fax: +421 (0) 53 41 888 18
email: sales@leaderlight.eu

TECHNICAL DRAWING

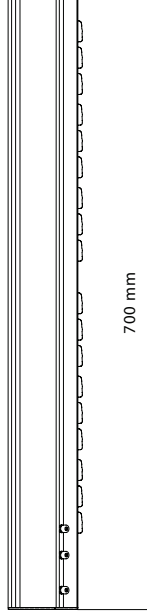

OPTIONAL ELECTRONIC MODULE

- LL STREET CLO: additional electronic module for constant light flux during the whole lifetime of luminaire and 10% extra energy saving
- LL STREET DLO: additional electronic module with preprogrammed regime of dimming which ensures dynamic change of light output over one night
- LL STREET CLO/DLO: additional electronic module provides constant light flux during the whole luminaire lifespan and simultaneously has programmed regime of dimming
- LL STREET IQRF: electronic module for wireless control with luminaires diagnostic

ORDER CODES


LL STREET ES570-16-33W-AT-40K-C75-NA
Crosswalks models - special order of optic +/-90 ° or Elliptic optic

ACCESSORIES

LL STREET WALL BRACKET


MOUNTING

Side pole Ø 60 mm




PHOTOMETRY


Optic WAS




Optic ASA




Optic ASD




Optic ASY




Optic AT




Optic ATD




Optic ATW



Optic DWC



Optic VSM



-0 ° H

-90 ° H

max Cd: 305° H

All rights reserved.
Specifications are subject to change without notice.